



# XPOWER®



## CREATING INCOME OPPORTUNITIES THRU PRECISION MANUFACTURING



## Who We Are

XPOWER Manufacture Inc. brings over 25 years of experience developing an expanding series of professional and consumer products with the most advanced technology in today's market. By creating a fully integrated design with state-of-the-art miniaturization, XPOWER's innovative products are lightweight, quiet, rugged and affordable – without sacrificing power or durability.

In partnership with its distributor network, XPOWER and its R&D engineers welcome new ideas and creative thinking to develop quality products for a profitable and long term relationship. XPOWER capitalizes on its global presence in its pursuit of enthusiastic and ambitious product distributors.

## Precision Manufacturing

XPOWER is continuously identifying and investing in advanced manufacturing technologies, including CNC injection molding equipment and a robust R&D team. Our highly trained engineering department is an active participant in the creation of fully integrated motor, housing, and fan designs.

The result – finished products that create and enhance opportunities while also conforming to the highest standards of efficiency, balance, and reliability.

## Global Organization

XPOWER seeks to provide maximum value with a combination of superior product quality and service. A worldwide presence created manufacturing for both 115V and 230V equipment for global distribution. US, direct import and OEM private label container orders enjoy prompt fulfillment from extensive inventory, thanks to world-class factory production capacity.

For product or parts assistance, XPOWER's customer service team offers comprehensive support for distributors and end users, assuring a first-class customer experience.

## Standards & Safety

XPOWER ensures product safety controls and maintains the highest production standards in the industry, with thermally protected motors that have globally recognized safety certifications.

Our world-class factory meets the rigorous standards required by big box retailers – ensuring consistent product quality standards and ethical working conditions are maintained.

To assure you of our commitment to quality, all XPOWER products have a 1 year limited manufacturer's warranty.





## TABLE OF CONTENTS

<b>Dehumidifiers</b> .....	pg 4 - 5
- XD-85L .....	
- XD-85LH .....	
<b>Pressurized Cavity Wall Dryer</b> .....	pg 6 - 7
- PDS-21 .....	
- PDS-12 .....	
<b>Centrifugal Air Movers</b> .....	pg 8 - 9
- P-130A .....	
- X-400A .....	
- X-600A .....	
<b>Low Profile</b> .....	pg 10 - 11
- PL-700A .....	
- XL-730A .....	
- XL-760AM .....	
<b>Axial Fans</b> .....	pg 12 - 13
- P-26AR .....	
- X-34AR .....	
- X-47ATR .....	
<b>Confined Space Fans</b> .....	pg 14 - 15
- X-8 .....	
- X-12 .....	
<b>Air Scrubbers</b> .....	pg 16
- X-2480A .....	
- X-3400A .....	
- IAQ 7000 .....	pg 17
<b>Restoration Schools</b> .....	pg 18 - 19
<b>Restoration Academy LLC</b> .....	
<b>Academy of Textile and Flooring</b> .....	
<b>Specifications</b> .....	pg 20 - 23

# LGR DEHUMIDIFIERS

## XD-85L

85 PPD @ AHAM

180 CFM, 6.7 AMP

The **XPOWER XD-85L** Large capacity compact LGR Dehumidifier is the latest in Advanced Water Damage Restoration Technology. With a patented High Efficiency Dual Intake System, the XD-85L has become the highest output Low Grain Refrigerant Dehumidifier in its class.

Boasting **85 PPD @ AHAM** (80°F / 60% RH), this **LGR** Dehumidifier draws 6.7 amps and includes all the features you have come to expect from a professional grade manufacturer. A digital display, smart controls, integrated handles, and self-purging water pump makes this 65 LB **180 CFM** powerhouse the dehumidifier of choice.


**Xactimate Code: WTRDHM>L**



Secure Stacked









The high performing **XD-85L** is also available with an add-on **handle and heavy duty wheels** for optimized portability. Labelled the XD-85LH,



The high performing **XD-85L** is also available with an add-on **handle and heavy duty wheels** for optimized portability. Labelled the XD-85LH,

**XD-85L**

**XD-85LH**

	<b>Water Removal @AHAM</b>	85 Pints Per Day	85 Pints Per Day
	<b>Water Removal @ Full Stauration</b>	145 Pints Per Day	145 Pints Per Day
	<b>Operating Range</b>	33° F - 105° F	33° F - 105° F
	<b>Amperage</b>	6.7 Amps	6.7 Amps
	<b>Airflow</b>	180 CFM	180 CFM
	<b>Weight</b>	65 Lbs.	67.2 Lbs.



# XD-85LH

85 PPD @ AHAM

180 CFM, 6.7 AMP

The high performing XD-85L is also available with an add-on **handle and heavy duty wheels** for optimized portability. Labelled the XD-85LH, water damage restoration technicians can now transport this **85 PPD** LGR Dehumidifier from storage to worksite with ease.


**Xactimate Code: WTRDHH>L**



**COLLAPSIBLE HANDLE COMING SOON**



### Programmable Humidity & Digital Display

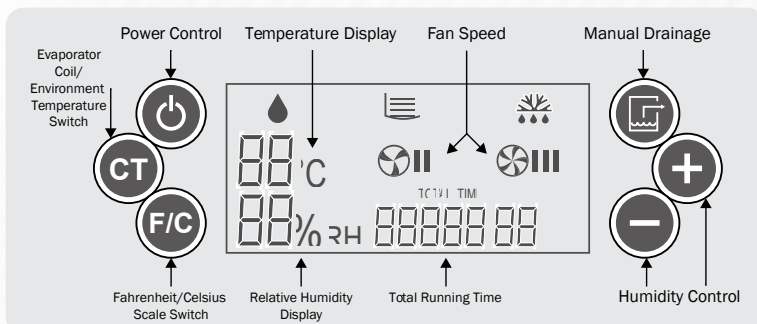



# Pressurized Cavity Wall Dryer



**PDS-21**  
Heat to 205°F



**Heat to 205°F.** There is no air mover motor, no squirrel cage, and no attachments. The PDS-21 is an all-in-one containment which makes this revolutionary product easy-to-use for big and small jobs alike. The PDS-21 makes drying easier and less frustrating than before. It is perfect for under sinks or behind cabinets and permanent furniture. Its portability makes drying a breeze.



- Pressurized air flow
- Most even airflow
- Built-in cord wrap
- Light Weight
- Easy grip handle
- On-board plug-off system
- Self healing thermal protection
- Stackable for storage






**Xactimate Code: WTRWALL (Wall Cavity Drying - Inj. Type)**






## PDS-12

Introducing the next generation of compact equipment made available by XPOWER. The PDS-12 is a lightweight wall cavity dryer that quietly delivers **heated air** for drying under sinks, behind cabinets, and permanent furniture. Equipped with a **variable speed switch**, Professional Restorers now have complete control of the airflow for any drying application.

	PDS-21	PDS-12
 <b>Horsepower</b>	2.6 HP	4 HP
 <b>Airflow</b>	92 CFM	160 CFM
 <b>Speed</b>	1 Speed	Variable Speed
 <b>Amperage</b>	9.0 Amps	12.0 Amps
 <b>Weight</b>	19 Lbs.	12.3 Lbs.

## Layflat Duct Connectors

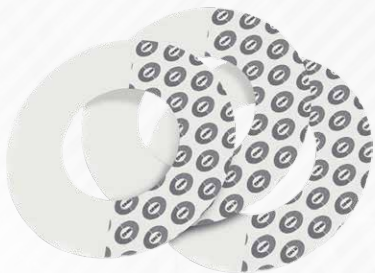

### D-Ring (24 Pack of 18", 12", 8" and 6")

No more staples, tape or hog rings! The **D-Ring** is the **fastest** and **easiest** way to make layflat duct **connections**. Save time, money and manpower. The D-Ring provides the greatest airflow of any method now in use. Ducts can be connected by one in just seconds. Best of all, they are reusable. A box of D-Rings contains 24 of any individual size 18 inch, 12 inch, 8 inch and 6 inch. **Fits any size layflat from 24" to 6"**



# Centrifugal Fans



**P-130A**

*825 CFM, 2.0 AMP*



## Micro Mini Crawl Space Dryer

This lightweight **3-speed** power house draws only 2.0 amps and produces **700 CFM** to dry those hard-to-reach places. The 2 built-in daisy chain power outlets makes this **9 Lbs.** champ a must-have fan for any restorer.

**Xactimate Code: WTRDRY-**



**X-400A**

*1600 CFM, 2.9 AMP*



This is the staple XPOWER Restoration Fan. This high output **3-speed** air mover produces **1600 CFM**. Built-in **daisy chain** power outlets integrated with the signature XPOWER **lightweight** high performance design makes this compact **17 Lbs.** air mover a vital addition to your arsenal of **Professional** Restoration equipment.

**Xactimate Code: WTRDRY**





## X-600A

2400 CFM, 3.8 AMP

This Professionals Choice weighs in at less than **22 Lbs.**, making the **X-600A** the lightest, **most compact** air mover in its class. Drawing only 3.8 amps, restorers can confidently daisy chain this **2400 CFM** workhorse using the on-board **GFCI** outlets.

**Xactimate Code: WTRDRY**



### Features



Stackable



Daisy Chain








Operating Positions

**P-130A**

**X-400A**

**X-600A**

	<b>Horsepower</b>	1/5 HP	1/4 HP	1/3 HP
	<b>Amperage</b>	2.0 Amps	2.9 Amps	3.8 Amps
	<b>Airflow</b>	825 CFM	1600 CFM	2400 CFM
	<b>Power Outlet</b>	Yes	Yes	Yes (GFCI)
	<b>Weight</b>	9.34 Lbs.	17.2 Lbs.	21.5 Lbs.

# Low Profile Air Movers



## PL-700A

1150 CFM, 2.8 AMP

The XPOWER PL-700A is a **compact 3-speed 1150 CFM** low profile air mover. Designed and constructed from durable polypropylene, this **1/3 HP** motor draws 2.8 amps and can be **daisy chained** utilizing the 2 built-in power outlets. A large intake and strategically placed vents on the underside will generate the airflow needed to effectively dry floors. This air mover can be stacked upwards to 6 units with its deep nested design.

**Xactimate Code: WTRDRY**



## XL-730A

1150 CFM, 2.8 AMP

Bookshelf Stacking



Secure Stacking



Designed with the restorer in mind, the **5-speed XPOWER XL-730A** Low Profile Air Mover features a **1/3 HP sealed induction motor** that produces **1150 CFM** and draws only 2.8 amps in the high setting. Daisy chain capability made possible with the 2 on-board **GFCI** outlets. The rugged ABS housing with deep nest design allows for secure stacking upwards to 6 units high for easy storage.

**Xactimate Code: WTRDRY**



# XL-760AM

1150 CFM, 2.8 AMP

Simplify and monitor operating time with the **XPOWER XL-760AM**. The integrated **hour meter** records the run time on this 1-speed low profile air mover. Specifications on this air mover also include a **1/3 HP** sealed induction motor, **1150 CFM**, 2.8 amp draw, 2 on-board **GFCI** outlets, large intake with strategic underside vents, and a rugged stackable ABS housing.

**Xactimate Code: WTRDRY**

## Features



2 Operating Positions








Daisy Chain (up to 4 units)

### PL-700A

### XL-730A

### XL-760AM

	PL-700A	XL-730A	XL-760AM
 Horsepower	1/3 HP	1/3 HP	1/3 HP
 Amperage	2.8 Amps	2.8 Amps	2.8 Amps
 Airflow	1150 CFM	1150 CFM	1150 CFM
 Power Outlet	Yes	Yes (GFCI)	Yes (GFCI)
 Weight	19.8 Lbs.	22.9 Lbs.	20.7 Lbs.

# Axial Air Movers



## P-21AR

1100 CFM, 0.6 AMP

The P-26AR Restoration Suppressor is a **lightweight 4-speed** micro mini axial that will help you overtake any water damage situation. This **1.0 amp** fan fires **1300 CFM** and can be **daisy chained** with the integrated power outlets. The barrel-like housing with advanced air fin technology mounted on a 360° tilt adjustable stand will help you quietly target those problematic flood zones.

## P-26AR

1300 CFM, 1.0 AMP

The P-26AR Restoration Suppressor is a **lightweight 4-speed** micro mini axial that will help you overtake any water damage situation. This **1.0 amp** fan fires **1300 CFM** and can be **daisy chained** with the integrated power outlets. The barrel-like housing with advanced air fin technology mounted on a 360° tilt adjustable stand will help you quietly target those problematic flood zones.



## X-34AR

1720 CFM, 1.6 AMP

This **1720 CFM Variable Speed** mini axial fan features a directional airflow design with fully adjustable 360° stand to help optimize ceiling, floor, and wall drying applications. Equipped with a sealed motor that draws only **1.6 amps**, restoration technicians can safely **daisy chain up to 5** units on a single circuit with the built-in power outlets. The **lightweight compact** design makes transporting this **stackable** axial fan stress-free.

**Xactimate Code: WTRDRY+**







## X-47ATR

3600 CFM, 2.8 AMP

The X-47ATR is easily the most compact and versatile axial fan on the market today. Weighing less than **23 Lbs.**, this **3600 CFM** beast draws 2.8 amps and can be safely **daisy chained** with the 2 on-board power outlets. Every unit comes fully assembled with a removable 360° tilt adjustable stand. A high torque sealed motor paired with an advanced air fin technology ensures continuous **directional airflow** upwards to **60 feet**.

**Xactimate Code: WTRDRY+**



Stackable



Daisy Chain  
(up to 4 units)



360° Rotation

**P-21AR**

**P-26AR**

**X-34AR**

**X-47ATR**

	<b>P-21AR</b>	<b>P-26AR</b>	<b>X-34AR</b>	<b>X-47ATR</b>
 <b>Horsepower</b>	115 W	115 W	1/4 HP	1/3 HP
 <b>Amperage</b>	6 Amps	1.0 Amps	1.6 Amps	2.8 Amps
 <b>Airflow</b>	1100 CFM	1300 CFM	1720 CFM	3600 CFM
 <b>Speed</b>	4 Speed	4 Speed	Variable Speed	Variable Speed
 <b>Weight</b>	10.4 Lbs.	11.7 Lbs.	16.7 Lbs.	21.5 Lbs.

# Confined Space Ventilator

**X-8**

1200 CFM, 2.5 AMP



Already an industry favourite, the variable speed **X-8** confined space ventilator provides complete control over **1200 CFM**. The **sealed motor** on this **8 inch** blower draws **2.5 amps** and will efficiently move air to where it is needed. The 2 ducting hose options, both sold separately, are the 8DH25 (25 feet of ducting in a transport bag) and the 8DHC25 (25 feet of ducting in an ABS transport case that securely fastens to either end of the blower).

**Xactimate Code: WTRDRY+**

## ACCESSORIES



**8DH25**  
X-8 8 Inch  
Duct Hose (25 Ft)



**8DHC25**  
X-8 Duct Hose Carrier  
with 25 Ft Duct Hose



	X-8	X-12
 Horsepower	1/3 HP	1/2 HP
 Amperage	2.5 Amps	6.0 Amps
 Airflow	1200 CFM	2600 CFM
 Weight	9.3 Lbs.	17.2 Lbs.

# X-12

2600 CFM, 6.0 AMP



The only 12 inch variable speed confined space ventilator available in the market produces **2600 CFM** while only drawing **6.0 amps**. Designed for portability, this **lightweight** compact **1/2 horsepower ventilator** can be connected to the 12DH25 ducting hose (sold separately) to channel fresh air upwards to 25 feet away.

**Xactimate Code: WTRDRY+**

## ACCESSORIES

## DUAL SIDED DUCTABLE RINGS



**12DH25**

X-12 12 Inch Duct Hose (25 Ft)



Pull air in or Push air out

# Air Scrubbers / Negative Air Machines

## X-2480A

550 CFM, 2.8 AMP



Less space, increased profitability. The lightweight **XPOWER X-2480A Mini HEPA Air Scrubber / Negative Air Machine** is a high performance air purifier in a compact design. This **550 CFM 3-Stage Air Scrubber** draws **2.8 amps** and includes a foam cover for the intake to prevent contamination. The **lightweight stackable ABS housing** includes **2 on-board power outlets** for daisy chain capability and an indicator light that illuminates when filters require attention.

**Xactimate Code: WTRNAFAN**

## X-3400A

600 CFM, 2.8 AMP



Developed to restore indoor air quality in a variety of applications, the **XPOWER X-3400A HEPA Air Scrubber / Negative Air Machine** efficiently produces **600 CFM** to effectively capture bacteria, allergens, mold, and sub-micron sized dust contaminants while only drawing **2.8 amps**. The variable speed switch and filter change indicator light provides complete operating control. A durable ABS housing with on-board GFCI power outlets ensures that this stackable **28 Lbs.** machine can be **transported with ease**.

**Xactimate Code: WTRNAFAN**



**Nylon Mesh Washable Filter**  
Easily cleaned and washable for long term use. This durable pre-filter prolongs the life of subsequent filter stages.

## ACCESSORIES


### X-2480A Air Scrubber Filters



**NFS13**  
Nylon Mesh Filter  
Washable



**PF13**  
Pleated Media Filter  
13" x 13" x 0.8"



**HEPA35-33**  
HEPA 1.4" Thick Filter  
13" x 13" x 1.4"

### HEPA X-3400A Air Scrubber Filters



**NFS16**  
Nylon Mesh Filter  
Washable



**PF16**  
Pleated Media Filter  
16' x 16" x 1"



**HEPA50**  
HEPA Filter  
16' x 16" x 2"





Easy mobility and stackability with 4 caster wheels.

# IAQ 7000

700 CFM, 2.1 AMP

Whether scrubbing air or evacuating as a negative air machine, the **Viking IAQ 7000** is the most powerful, dependable, and cost effective air scrubber in its class to date! After surveying independent contractors, we listened to their needs and produced a machine that draws a mere **2.1 amps** and delivers **over 700 CFM**. The IAQ 7000 provides the needed **HEPA filtration** with the best return on investment unrivaled. Not to mention, we also made them **4 wheel drive** and stackable for easy transporting.

**Xactimate Code: WTRNAFAN>**

## ACCESSORIES



**FHEPA16202**  
HEPA Filter  
16" x 20" x 2"





**F16161P**  
Pre Filter  
16" x 16" x 1"

### X-3400A

### X-2480A

### IAQ-7000

 Horsepower	1/2 HP	1/2 HP	1/3 HP
 Airflow	600 CFM	550 CFM	700 CFM
 Speed	Variable Speed	5 Speed	2 Speed
 Power Outlet	Yes (GFCI)	Yes	Yes (GFCI)
 Weight	28.8 Lbs.	23.6 Lbs.	57.5 Lbs.

# RESTORATION ACADEMY LLC



## Bryan Brainerd -IICRC WRT, ASD, WRT/ASD

Bryan Brainerd has been in the Restoration industry for over 24+ years and a IICRC approved instructor since 2000. He has been teaching for 18+ years in courses such as, Water Restoration Technician (WRT), Fire Smoke Restoration Technician (FSRT), Applied Structural Drying Course (ASD), and the WRT/ASD Combo Course. Bryan Brainerd is an esteemed committee member on the IICRC, FSRT, ASD, WRT, and TAC committee.

Restoration Academy LLC was founded in 2012 by Bryan Brainerd. Bryan has been involved in restoration since 1994 and instructing since 2000. Prior to starting Restoration Academy, Bryan worked for Paul Davis (Franchisor) as the Director of Emergency Services, overseeing training and operation compliance with the network of franchises. Prior to Paul Davis, Bryan worked with ServPro of North Indianapolis as well as their Director/Trainership, consulting on a wide variety of restoration jobs. Bryan has developed training programs for employees, managers and owners of several restoration firms.



**Bryan Brainerd**



**Restoration Academy  
Flood House**



**Restoration Academy Training**



**Centrifugal**



**Duct Drying**



**PDS-21**



**Axial Fan**



**LGR Dehumidifier**



**Low Profile**

# THE ACADEMY OF TEXTILES AND FLOORING



## Nate Seward

Our Primary Training Center maintains a comfortable and innovative opportunity to allow our students to get a true “hands on experience”.

With multiple training rooms, our main training room will comfortably hold up to 30 students and our smaller training room which can hold up to 15 students if necessary. Our warehouse and testing center contains training modules with simulated residential and commercial settings to help provide the best real life situations possible.

We have numerous types of equipment for you to “play” with from the world's leading manufacturers in drying and restoration equipment. ATF does not endorse any manufacturer or brand, our mission is to provide our students with science-based technology facts, completely unbiased so that the student can make their own decision on what works best.



The Academy Of Textiles And Flooring



The Academy Of Textiles And Flooring



Wood Floor



PDS-21



90° Drying



Ceiling Dry



Axial Action



LGR Dehumidifer

# PRODUCT SPECIFICATION

## LGR DEHUMIDIFIERS

MODEL NO.	XD-85L	XD-85LH
WATER REMOVAL EFFICIENCY AT AHAM (80 °F/60% RH)	85 Pints per day	85 Pints per day
WATER REMOVAL AT FULL SATURATION (90°F , 90% RH)	145 Pints Per Day	145 Pints Per Day
VOLTS/HERTZ	115 V~60 Hz	115 V~60 Hz
POWER	6.7 A	6.7 A
RATED AIRFLOW	180 CFM	180 CFM
SPEEDS	2 Speed Control	2 Speed Control
FILTER TYPE	3M HAF Filter	3M HAF Filter
Housing	PE	PE
Cord Length	25 Ft.	25 Ft.
Drain Hose Length	40 Ft.	40 Ft.
Time Meter	Up to 9999 hours 50 minutes	Up to 9999 hours 50 minutes
Operating Range	33°F - 105°F	33°F - 105°F
UNIT WEIGHT	65 Lbs.	67.2 Lbs.
UNIT DIMENSIONS (LxWxH)	13.1 x 21.5 x 19.2 in	13.1 x 29.9 x 22.2 in
BOX WEIGHT	73 Lbs.	75 Lbs.
BOX DIMENSIONS (LxWxH)	14.8 x 25.7 x 21.7 in	14.8 x 25.7 x 23.7 in
SAFETY CERTIFICATIONS	ETL / CETL	ETL / CETL
PALLET QUANTITY	18	18

## PRESSURIZED CAVITY WALL DRYER

MODEL NO.	PDS-21	PDS-12
VOLTS/HERTZ	115V / 60Hz	115V / 60Hz
MOTOR	2-Stage Tangential By-Pass	4 HP
POWER	9 A	12 A
RATED AIRFLOW	92 CFM	160 CFM
SPEEDS	1 Speed	Variable Speed
CORD LENGTH	25 Ft.	10 Ft.
STACKABLE	Yes	No
TUBING	3/8 id 1/2 od Black (200 Ft.)	3/8 id 1/2 od Black (100 Ft.)
OPERATING TEMPERATURE	Up to 205° F	Up to 100° F
UNIT WEIGHT	19 Lbs.	12.3 Lbs.
UNIT DIMENSIONS (LxWxH)	20.5 X 16.7 X 18.5 in	17.7 x 6.3 x 9.8 in
BOX WEIGHT	35.6 Lbs.	-
BOX DIMENSIONS (LxWxH)	21 x 19 x 22 in.	-
HOUSING	Roto Molded Polyethylene	ABS
SAFETY CERTIFICATIONS	UL Approved Motor	ETL / CETL
THERMAL PROTECTION	Thermal Protection Switch + Auto Reset	No
PALLET QUANTITY	16	30

## CENTRIFUGAL AIR MOVERS

MODEL NO.	P-130A	X-400A	X-600A
VOLTS/HERTZ	115V / 60Hz	115V / 60Hz	115V / 60Hz
MOTOR	1/5 HP	1/4 HP	1/2 HP
POWER	2 A	2.9 A	3.8A
RATED AIRFLOW	825 CFM	1600 CFM	2400 CFM
SPEEDS	3 Speed	3 Speed	3 Speed
CORD LENGTH	10 ft.	20 ft.	25 ft.
OPERATING POSITIONS	0°, 20°, 45° & 90°	0°, 20°, 45° & 90°	0°, 20°, 45°, 90°
STACKABLE	Yes	Yes	Yes
DAISY CHAIN	Yes	Yes	Yes (GFCI)
CARPET CLAMP	-	-	Optional
HANDLE W/ WHEELS	-	-	Optional
UNIT WEIGHT	9.34 lbs.	17.2 lbs.	21.5"
UNIT DIMENSIONS (LXWXH)	10.7 x 12.4 x 13.3 in	13.9 x 14.8 x 14.6 in	15.9 x 15.7 x 16.3 in
BOX WEIGHT	11 Lbs.	21.2 Lbs.	25.2 Lbs.
BOX DIMENSIONS (LXWXH)	13.6 x 12.8 x 11 in	15.5 x 15 x 15.2 in	16.7 x 16.5 x 17.3 in
HOUSING	PP	ABS	ABS
SAFETY CERTIFICATIONS	ETL / CETL	ETL / CETL	ETL / CETL
DUAL THERMAL PROTECTION	Yes	Yes	Yes
PALLET QUANTITY	72	45	36

## LOW PROFILE AIR MOVERS

MODEL NO.	PL-700A	XL-730A	XL-760AM
VOLTS/HERTZ	115V / 60Hz	115V / 60Hz	115V / 60Hz
MOTOR	1/3 HP	1/3 HP	1/3 HP
POWER	2.8 A	2.8 A	2.8 A
RATED AIRFLOW	1150 CFM	1150 CFM	1150 CFM
SPEEDS	3 Speed	5 Speed	1 Speed
CORD LENGTH	15 ft.	15 ft.	15 ft.
OPERATING POSITIONS	2 Positions	2 Positions	2 Positions
STACKABLE	Yes	Yes	Yes
BUILT-IN POWER OUTLET	Yes	Yes (GFCI)	Yes (GFCI)
UNIT WEIGHT	19.8 Lbs.	22.9 Lbs.	20.7 Lbs.
UNIT DIMENSIONS (LXWXH)	17.7 x 17.7 x 8.3 in	17.7 x 17.7 x 8.3 in	17.7 x 17.7 x 8.3 in
BOX WEIGHT	21.2 lbs.	24.3 lbs.	22 lbs.
BOX DIMENSIONS (LXWXH)	18.8 x 8.7 x 18.1 in	18.8 x 8.7 x 18.1 in	18.8 x 8.7 x 18.1 in
HOUSING	PP	ABS	ABS
SAFETY CERTIFICATIONS	ETL / CETL	ETL / CETL	ETL / CETL
DUAL THERMAL PROTECTION	Yes	Yes	Yes
PALLET QUANTITY	54	54	54

# PRODUCT SPECIFICATION

## PROFESSIONAL AXIAL FANS

MODEL NO.	P-21A	P-26A	X-34AR	X-47ATR
VOLTS/HERTZ	115V / 60Hz	115V / 60Hz	115V / 60Hz	115V / 60Hz
MOTOR	69 W	115 W	1/4 HP	1/3 HP
POWER	.6 A	1 A	1.6 A	2.8 A
RATED AIRFLOW	1100 CFM	1300 CFM	1720 CFM	3600 CFM
SPEEDS	4 Speed	4 Speed	Variable	Variable
CORD LENGTH	10 ft.	10 ft.	20 ft.	20 ft.
OPERATING POSITIONS	360° Rotation (10" Height Rack Included)	360° Rotation (10" Height Rack Included)	360° Rotation (10" Height Rack Included)	360° Rotation (10" Height Rack Included)
STACKABLE	Yes	Yes	Yes	Yes
3 HOUR TIMER	-	-	-	Yes
DAISY CHAIN	Yes	Yes	Yes	Yes
UNIT WEIGHT	10.4 Lbs.	11.7 Lbs.	16.7 Lbs.	22.2 Lbs.
UNIT DIMENSIONS (LxWxH)	16.1 x 4.2 x 8.9 in.	17.3 x 15.4 x 8.9 in.	18.6 x 9.4 x 19.2 in	21.9 x 9.8 x 22.5 in
BOX WEIGHT	22.5 Lbs.	13.7 Lbs.	20.5 Lbs.	28.7 Lbs.
BOX DIMENSIONS (LxWxH)	15.4 x 14.6 x 9.25 in.	16.5 x 15.7 x 9.25 in.	19.7 x 17.7 x 10.6 in	22.6 x 23.2 x 11.4 in
HOUSING	ABS	ABS	ABS	ABS
SAFETY CERTIFICATIONS	ETL / CETL	ETL / CETL	ETL / CETL	ETL / CETL
DUAL THERMAL PROTECTION	Yes	Yes	Yes	Yes
PALLET QUANTITY	42	42	42	28

## CONFINED SPACE FANS

MODEL NO.	X-8	X-12
VOLTS/HERTZ	115V / 60Hz	115V / 60Hz
MOTOR	1/3 HP	1/2 HP
POWER	2.5 A	6 A
RATED AIRFLOW	1200 CFM	2600 CFM
SPEEDS	Variable	Variable
CORD LENGTH	20 ft.	20 ft.
UNIT WEIGHT	13.5 Lbs.	23.4 Lbs.
UNIT DIMENSIONS (LxWxH)	13.6 x 11.1 x 15.4 in	15 x 13.6 x 18 in
BOX WEIGHT	15.8 Lbs.	26.5 Lbs.
BOX DIMENSIONS (LxWxH)	14.4 x 12 x 15.9 in	15.7 x 14.4 x 18.9 in
HOUSING	ABS	ABS
SAFETY CERTIFICATIONS	ETL / CETL	ETL / CETL
DUAL THERMAL PROTECTION	Yes	Yes
PALLET QUANTITY	60	36

## AIR SCRUBBERS

MODEL NO.	X-2480A	X-3400A
VOLTS/HERTZ	115V / 60Hz	115V / 60Hz
MOTOR	1/2 HP	1/2 HP
POWER	2.8 A	2.8 A
RATED AIRFLOW	550 CFM	600 CFM
SPEEDS	5 Speed	Variable Speed Control
CORD LENGTH	13 ft.	13 ft.
DAISY CHAIN	Yes	Yes (GFCI)
STACKABLE	Yes	Yes
UNIT WEIGHT	23.6 Lbs.	28.8 Lbs
UNIT DIMENSIONS (LxWxH)	16.6 x 10.4 x 18.9 in	19.6 x 12.3 x 21.6 in
HOUSING	ABS	ABS
DUCT SIZE (Air Outlet Dimensions)	-	5 x 10.8 in.
SAFETY CERTIFICATIONS	ETL / CETL	ETL / CETL
DUAL THERMAL PROTECTION	Yes	Yes
PALLET QUANTITY	32	18

### 3 STAGE FILTERS

1ST STAGE FILTER	<b>NFS13</b> - Washable Nylon Mesh Filter (13" x 13")	<b>NFS16</b> - Washable Nylon Mesh Filter (16" x 16")
2ND STAGE FILTER	<b>PF13</b> - Pleated Media Filter (13" x 13")	<b>PF16</b> - Pleated Media Filter (16" x 16")
3RD STAGE FILTER	<b>HEPA35-33</b> - 1.4" Thick HEPA Filter (13" x 13")	<b>HEPA50</b> - 2" Thick HEPA Filter (16" x 16")
FILTER CHANGE LIGHT	Indicates when filter needs to be cleaned or changed	Indicates when filter needs to be cleaned or changed

## VIKING AIR SCRUBBERS

MODEL NO.	IAQ 7000
VOLTS/HERTZ	115V, 60Hz
MOTOR	1/3 HP
POWER	2.1 A
RATED AIRFLOW	700 CFM
SPEEDS	2 Speed Rocker
CORD LENGTH	25 Ft.
GFCI DAISY CHAIN	Yes (Plug 4 units together)
STACKABLE	Yes
UNIT WEIGHT	57.5 Lbs.
UNIT DIMENSIONS (LxWxH)	25.18 x 24.75 x 17.87 in.
HOUSING	Roto Molded Polyethylene
DUCT SIZE (Air Outlet Dimensions)	10 in.
SAFETY CERTIFICATIONS	ETL / CETL
DUAL THERMAL PROTECTION	Yes
PALLET QUANTITY	6

### 2 STAGE FILTERS

1ST STAGE FILTER	<b>F16161P</b> HEPA Filter 16x16x1
2ND STAGE FILTER	<b>FHEPA16202</b> HEPA Filter 16x20x2



**XPOWER®**

*Come Dry With Us*



*Increase profits by up to 30% with the most compact lightest products today!*

XPOWER MANUFACTURE, INC.  
240 Clary Avenue San Gabriel, CA 91776  
Toll Free 1-855-855-8868 • Viking 1-800-252-5201

VISIT US AT  
[WWW.XPOWER.COM](http://WWW.XPOWER.COM)  
[WWW.VIKINGAIROVERS.COM](http://WWW.VIKINGAIROVERS.COM)