


ALUMINUM FOIL TAPE

50 micron foil

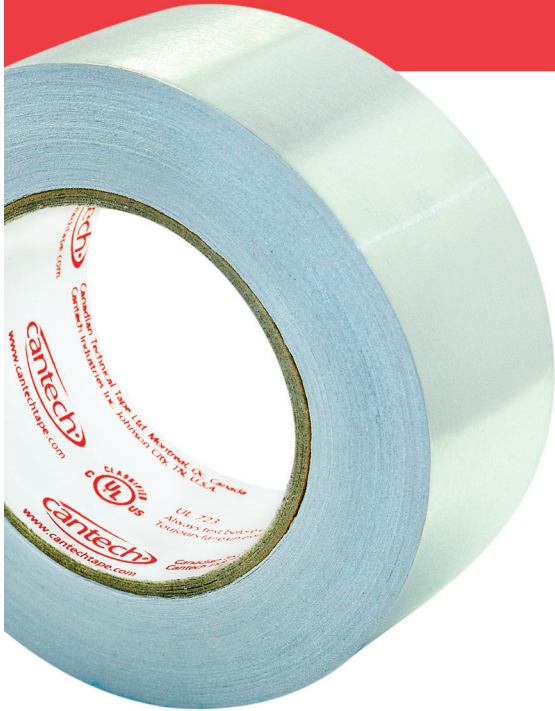

DESCRIPTION

This aluminum foil tape is designed to be used in duct insulation. The tape offers good conformability, high holding power and long term performance. UL 723 listed.

MAIN FEATURES

- Listed UL 723 "Test for Surface Burning Characteristics of Building Materials".
- Good conformability.
- High holding power.
- Long term performance.
- Good temperature resistance.
- Good reflectivity of heat and light.

APPLICATIONS

- Join and seal duct work.
- Join and seal duct insulation.
- Insulation boards and batts.
- Seaming, sealing and patching of fiberglass duct board and other foil faced products.

TECHNICAL DATA

Colour	Silver
Backing	50 micron (2 mil) Aluminum foil
Adhesive	Solvent based acrylic
Thickness	3.5 mil
Adhesion	75 oz/in
Tensile Strength.....	20 lb/in
Application Temperature.....	10°C to 40°C (50°F to 104°F)
Temperature Resistance	-40°C to 120°C (-40°F to 248°F)

STOCK SIZE

- 48 mm x 45 m
- 48 mm x 90 m
- 72 mm x 45 m
- 72 mm x 90 m

Please note:

The technical characteristics quoted are averages only and may vary within industry tolerances.

The final user must assure product suitability for the application and assumes all risks and liabilities.

